


5.6-A7-5
SR JOB NO. SHEET


Last revised on : 04/22/2010

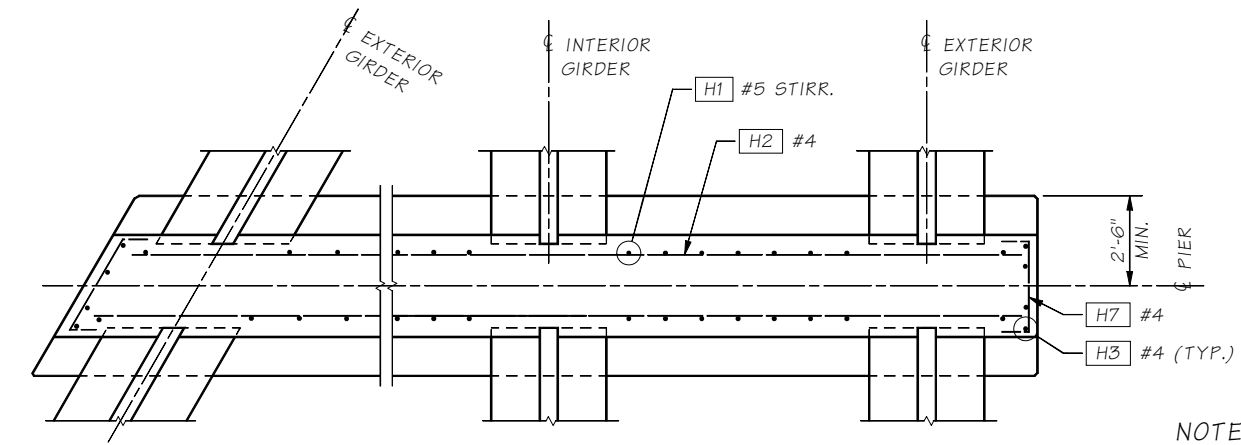

SKewed

SECTION B

NO SKEW

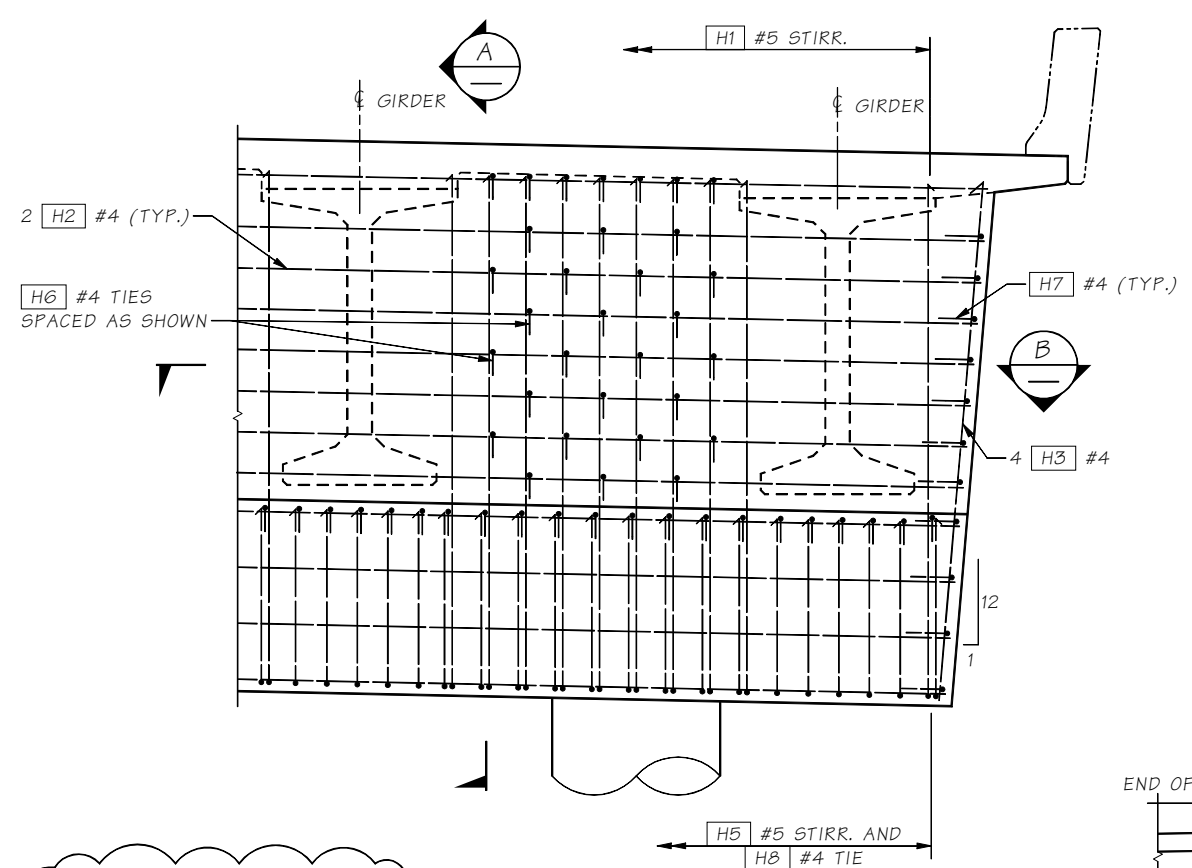

NOTES TO DESIGNER

1. Flush Diaphragms are preferred.

2. The actual bar size and spacing shall be determined by the designer.

NOTE TO DETAILER:

Revise Details to show correct girder height.

ELEVATION

ELEVATION AT TOP OF OAK BLOCK

GIRDER	PIER [?]	
	BACK STATION	AHEAD STATION


NOTES:

- GIRDERS SHALL BE HELD RIGIDLY IN PLACE WHEN DIAPHRAGMS ARE PLACED.
- CUT/RELEASE GIRDER TEMPORARY STRANDS BEFORE CASTING DIAPHRAGM. SEE TEMPORARY STRAND CUTTING SEQUENCE.
- EXTENDED STRANDS AND GIRDER REINFORCING NOT SHOWN FOR CLARITY.
- LONGITUDINAL DIMENSIONS ARE NORMAL TO SKEW.
- FOR CONCRETE PLACEMENT PROCEDURE SEE "SUPERSTRUCTURE CONSTRUCTION SEQUENCE" SHEET.


NOTE TO DESIGNER

Replace B3 and B4 with appropriate values.


GIRDER	B3	B4
WF36G	3"	3"
WF42G	3"	3"
WF50G	3"	3"
WF58G	3"	3"
WF66G	4 1/2"	3 1/2"
WF74G	4 1/2"	4"
WF83G	4 1/2"	4 1/2"
WF95G	4 1/2"	5"
WF100G	5"	5 1/2"

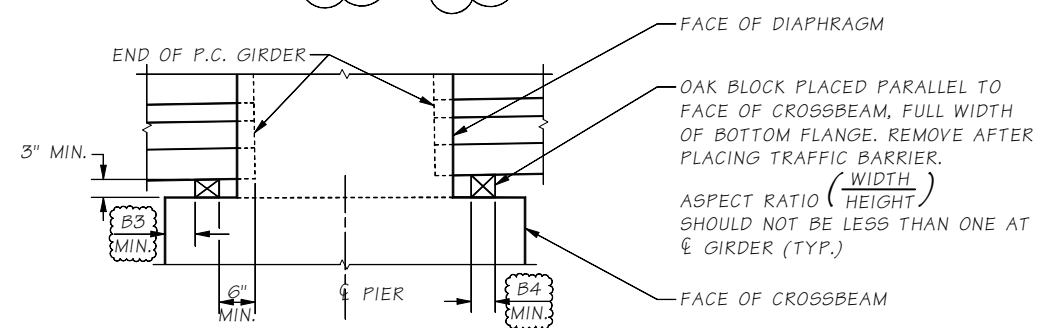

OAK BLOCK DETAIL

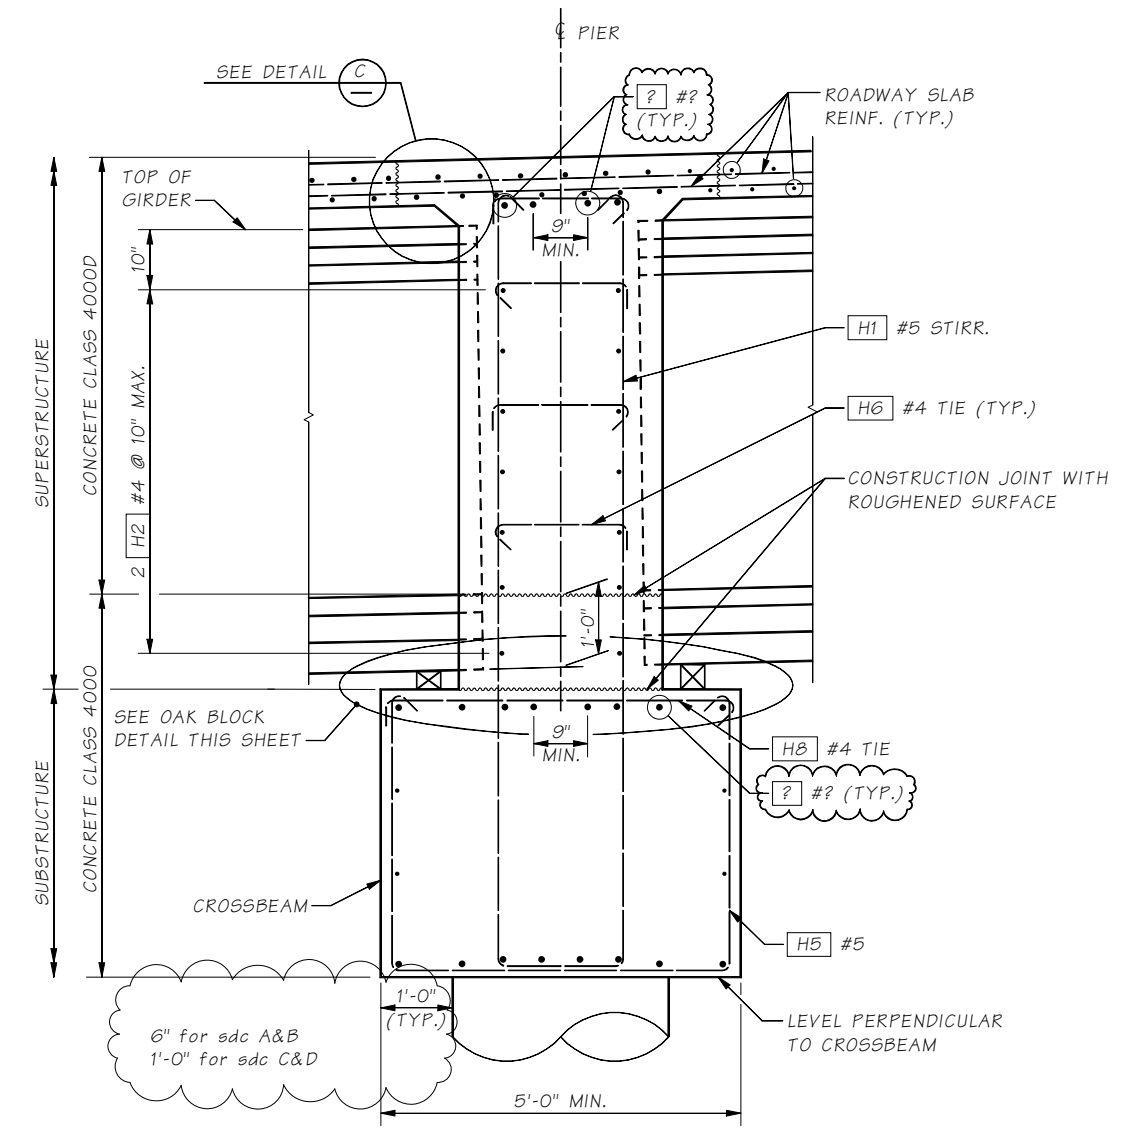

SECTION A

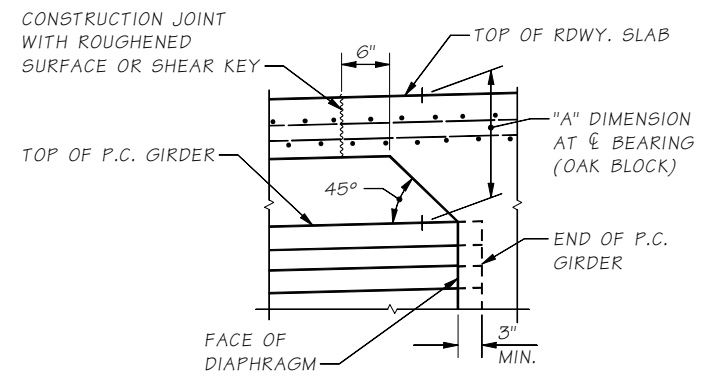

DETAIL C

DIAPHRAGM REINFORCING NOT SHOWN FOR CLARITY

Bridge Design Engr.	M:\STANDARDS\Girders\WF\FIX_RECESSED_FACE_INTER_PIER_DIAPH_DET.MAN	REGION NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
Supervisor		10	WASH.			
Designed By		JOB NUMBER				
Checked By						
Detailed By						
Bridge Projects Engr.						
Prelim. Plan By						
Architect/Specialist	DATE	REVISION	BY	APPD		

Wed Oct 27 08:58:28 2010

BRIDGE AND STRUCTURES OFFICE



STANDARD PRESTRESSED CONCRETE GIRDERS

RECESSED DIAPHRAGM AT INTERMEDIATE PIER DETAILS

BRIDGE SHEET NO.
SHEET
OF
SHEETS